


# Pinch Pleat Drapery

A timeless classic, pinch pleat draperies offer both value and superior light blocking capabilities, making them a great solution for most hospitality projects.


## FABRICATION SPECIFICATIONS

- Standard 3-finger pleat style, with 2-finger or 1-finger options available.
- Pleats are spaced approximately 3"-5" apart, varying by drapery fullness.
- Configurations include center-open, one-way draw, or offset pairs.
- Standard fullness is 200%, with options of 250% or 300%.
- Widths joined using overlocked seams and safety stitch.
- Fabric selvages removed or clipped as necessary prior to fabrication.
- 4" drapery heading with enclosed buckram to provide structure.
- 1-1/2" double-turned blind stitched side hems.
- 4" double-turned bottom hems are blind stitched (blackout is single stitched) with complimenting color thread with fabric-wrapped lead weights at corners and seams.
- For sheer fabrics, continuous chain weight (shot tape) and rolled hem options are available.
- Lining options include FR 2-Pass or 3-pass blackout, or FR poly/cotton light-filtering.
- Drapery linings are joined by overlocking and have a 2-1/2" hem placed 3/4" above the bottom hem of the face fabric.


PINCH PLEAT DIAGRAM

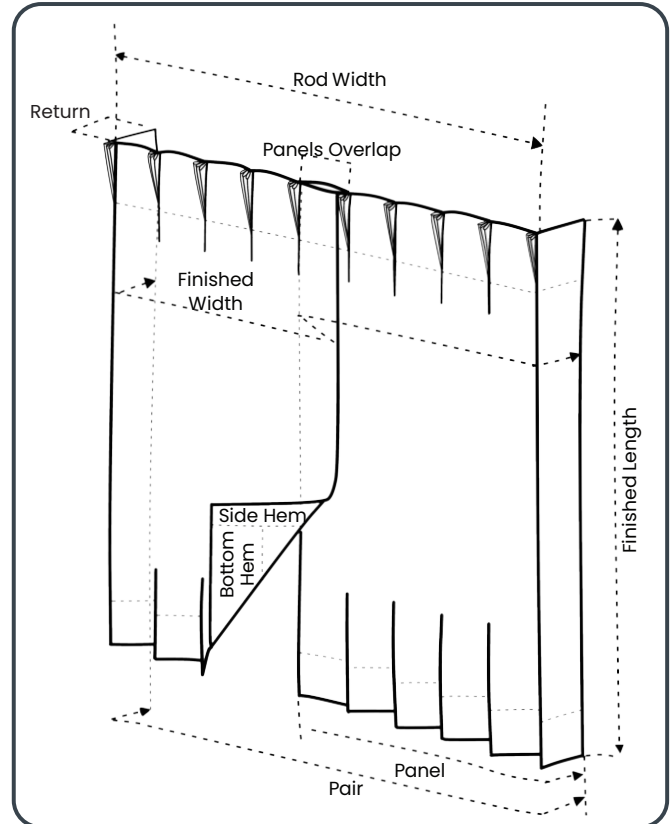


PLEAT DETAIL

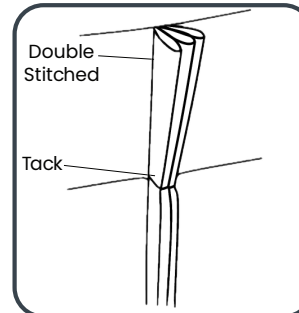


SLIDE CARRIER DETAIL




PINCH PLEAT FULLNESS

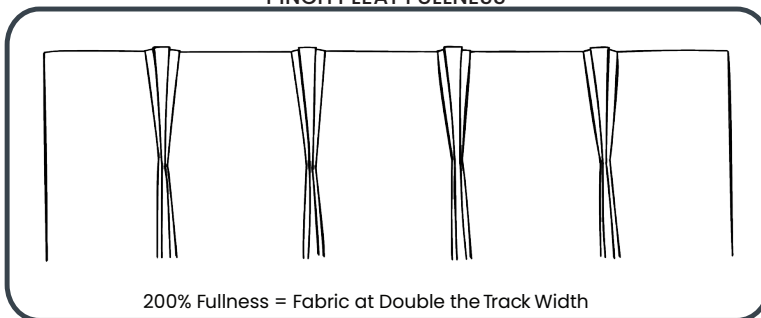

HEADRAIL WRAP DETAIL

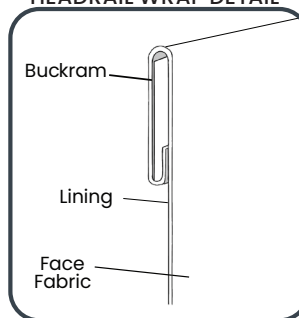

HEM DETAIL



## NOTE

- Justin David offers a wide variety of drapery, sheer, and coated blackout fabrics, but also welcomes customer-provided (COM) or buy-out fabrics.
- The purchaser is responsible for assuring that COM fabrics meet NFPA-701, or other locally required fire codes.
- Suitable mounting surfaces, and structural support where required, are to be provided by others.